



Model: XV-I2365B-VF

6MP motorized zoom lens turret poe IP Camera

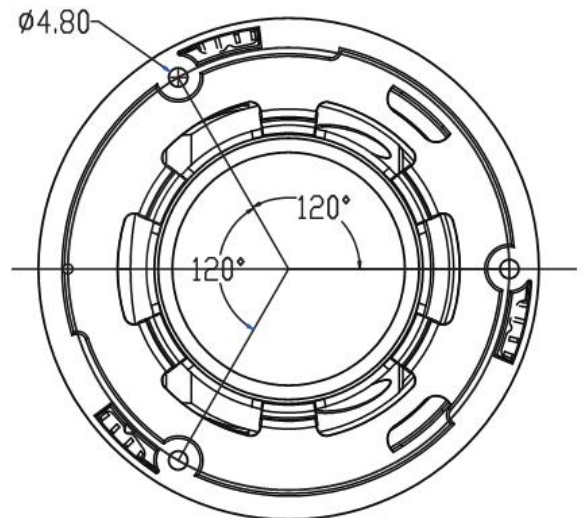

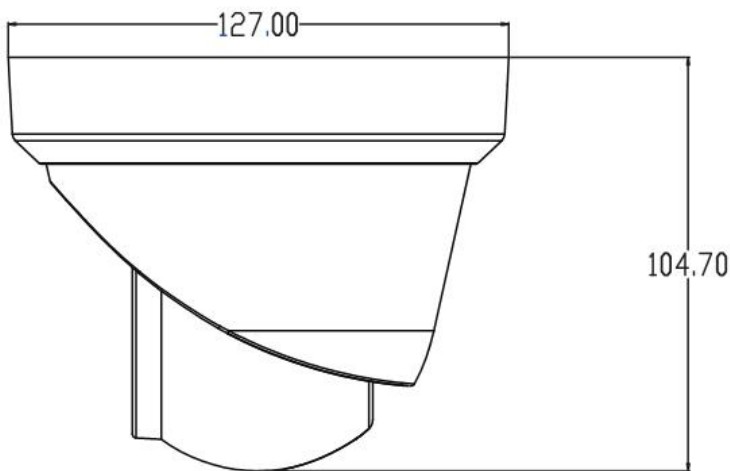

Features:

- ❖ 1/2.8" SONY IMX335 CMOS sensor
- ❖ Full HD resolution 6MP@ 3072 x 2048P
- ❖ Ultra low illumination 0.01Lux
- ❖ Day/Night (ICR), AWB, AGC, BLC, 2D/3D-DNR, IR-CUT
- ❖ D-WDR, Motion Detection, Privacy Mask, Mirror
- ❖ RTSP and Onvif 17.06 compatible
- ❖ H.265/H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multi web browser, PC Client, mobile APP remote access
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP67
- ❖ 18pcs IR SMD Leds, IR distance 20-30m
- ❖ HD 2.8-8mm 3X motorized zoom and auto focus lens

Technical Specifications:

Model	XV-I2365B-VF
Camera	
Image Sensor	1/2.8" SONY IMX335 CMOS
Effective Pixels	3072 (H) × 2048 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
AGC/BLC	Support
DNR	2D/3D DNR
Other	Human body and Vehicle detection ,Motion Detection, Privacy Mask, Mirror, flip
Encode	
Embedded Solution	Sigmastar 30KQ
Video Standard	H.265/H.264
Video Resolution	Main Stream: 25fps@6MP(3072x2048)/5MP(2592x1944), 30fps@4MP/3MP/1080P/720P Sub stream: 30fps@D1/VGA/360P/CIF, etc.

Video Bitrates	64Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
IR Led	
IR Led	18pcs IR SMD Leds, IR distance 20-30m
Lens	
Focal length	HD 2.8-8mm 3X motorized zoom and auto focus lens
Optional Function	
Built in microphone and so on	
Network Services	
Protocol	HTTP(S)/RTSP/RTMP/FTP/NFS/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox 32bit ESR, etc.
Media	CMS, Android, IOS
ONVIF	17.06compatible
General	
Network Port	1-RJ45, 100Mbps
Power Supply	12 VDC ± 10%
Power Consumption	< 5 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH