


Model:XV-I2367B-DL2Z

6MP 2.7-13.5mm 5X motorized zoom and AF lens dual light Turret IP Camera

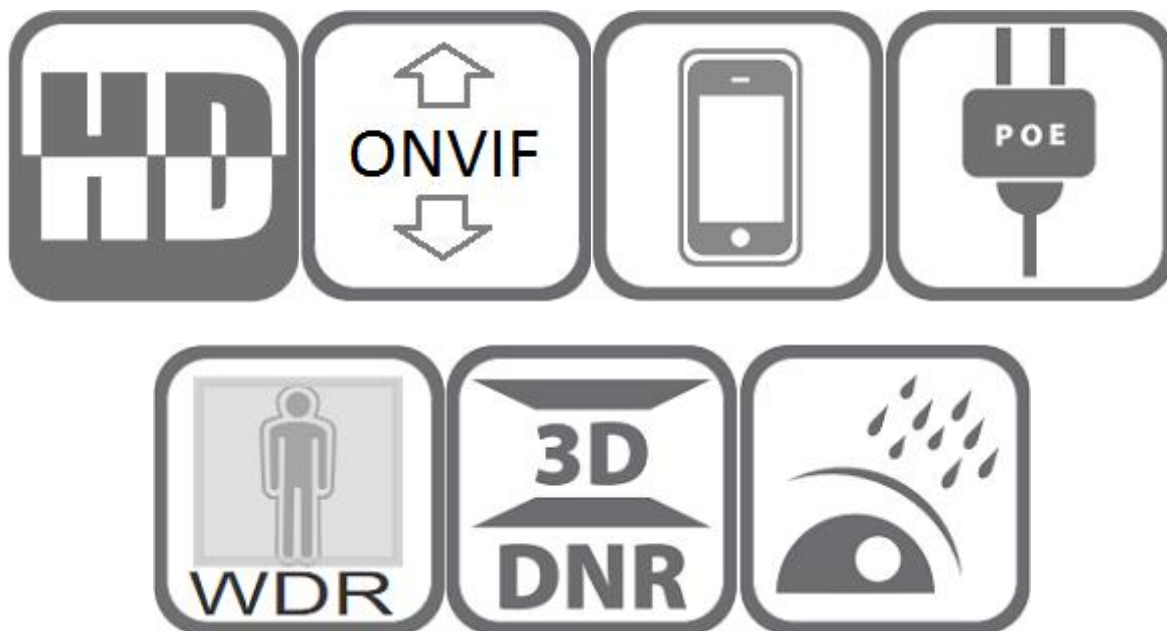

Features:

- 1/2.8" Sony CMOS sensor

- 6MP resolution 3072 x 2048P
- Low illumination 0.01Lux
- Day/Night, AWB/MWB,BLC, HLC, 2D/3D-DNR,Shutter, IR-CUT
- D-WDR, Mirror, Defogging
- Multiply Style OSD Overlay,Motion Detection, Privacy Mask
- RTSP and Onvif 17.06 compatible with many third-party NVR
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Support user authentication, video data encryption
- Support Alarm Snapshot to Email and FTP
- Multiply WEB browser IE, Firefox 32bit ESR,Chrome, Edge, PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af PoE
- Lightning protection 4000V
- Strong water-proof housing, IP67
- 4PCS dual Lights, IR distance:30-40M;Warm light distance:30-40M
- HD 2.7-13.5mm 5X motorized zoom and auto focus lens
- Built-in Microphone and speaker, two way audio, with SD card slot,with reset button
- Human body and Vehicle detection

Technical Specifications:

Model	XV-I2367B-DL2Z
Camera	
Image Sensor	1/2.8" Sony IMX335 CMOS
Effective Pixels	3072 (H) × 2048 (V), 6Megapixel
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC /HLC	Support
DNR	2D/3D DNR
Other	Human body and Vehicle detection ,Privacy Mask, Flip ,OSD overlay, video cover alarm
Encode	
Video Standard	H.265+/H.265/H.264
Video Resolution	Main Stream:25fps@6MP(3072x2048)/5MP(2592x1944)/4MP/3MP/1080P/720P,etc. Sub stream: 720x480/VGA(640x480)/360P/QVGA@25fps,etc.
Video Bitrates	512Kbps - 10Mbps, VBR/CBR

Audio Standard	G.711-u/G.711-a/AAC
Smart Detection	Human body and Vehicle Detection
LED and distance	
Led	4PCs Dual Lights
IR Distance	30-40 M
Warm Light Distance	30-40 M
Lens	
Focal length	HD 2.7-13.5mm 5X motorized zoom and auto focus lens
Functions	
Built in microphone and speaker ,with SD card slot(support up to 512GB SD card)	
Network Services	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS, etc.
P2P	Yes
Web	IE , Firefox (32bit esr),Chrome ,Edge ,etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	12 VDC \pm 10%
Power Consumption	< 10 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH